
## New Logic board

1 Phase 2013<mark>9669</mark>0008

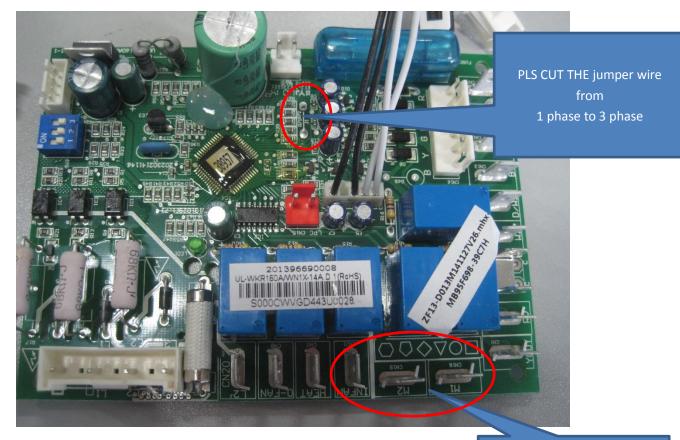

Switch 1	ON	MANAL DEFROST
OFF :normal DEFROST		
Switch2	ON	intelligent defrost
	OFF :	normal DEFROST
Switch2	ON:	defrost alternating time :30min
	OFF:	defrost alternating time :60min

LED 0%

1 time flash: T3 sensor is fault

- 2 time flash: T4 sensor is fault
- 3 time flash: low pressure sensor is fault
- 4 time flash: phase sequence is wrong. (it is useless on the 1phase units)

IFAN IS factory setting speed, the M1,M2 is the other two parking station