




Midea M152H Series Heat Pump

Up to 15.2 SEER2

Cooling capacity: 18 - 60 kBtu/h

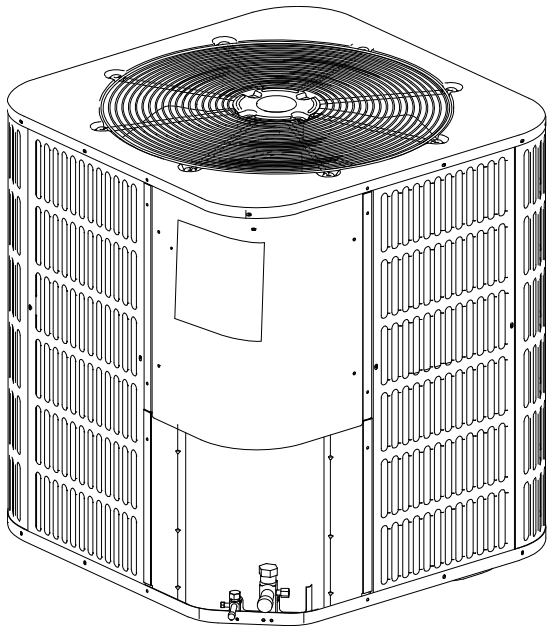

Contents:

1 NOMENCLATURE.....	2
2 SPECIFICATIONS.....	3
3 WIRING DIAGRAMS.....	5
4 DIMENSIONS.....	7



Standard Features:

- R410A chlorine-free refrigerant.
- Energy-efficient compressor.
- Internally protection against high temperature motor overload conditions.
- High quality condenser with inner-groove copper tube and aluminum fin.
- Service valves with sweat connections and easy-access gauge ports.
- Factory-installed high pressure switch and low pressure switch.
- AHRI certified and ETL listed.
- Optional drier filter as accessory.

Cabinet Features:

- Unique sound control top design.
- Compact design, easy installation and transportation.
- Powder-painted galvanized steel cabinet.
- Wire fan discharge grille.
- Steel louver coil guard

1 Nomenclature

M	O	V	A	-	24	H	N1	-	M	152	L
1	2	3	4		5	6	7		8	9	10

Legend		
No.	Code	Remarks
1	M	Brand: Midea
2	O	Outdoor unit
3	V	Discharge type: vertical discharge
4	A	Version No.: A version
5	24	Capacity: 18: 18 kBtu/h; 24: 24 kBtu/h; 30: 30 kBtu/h; 36: 36 kBtu/h; 42: 42 kBtu/h; 48: 48 kBtu/h; 60: 60 kBtu/h; 61: 60 kBtu/h;
6	H	Unit type: H: heat pump; C: cooling only
7	N1	Refrigerant type: N1: R410A
8	M	Power supply type: M: 1-Phase; X: 3- Phase
9	152	Efficiency: 152: 15.2 SEER; 134: 13.4 SEER
10	L	Compressor type: L: LG compressor; G: GMCC compressor

2 Specifications


	MOVA-18H N1-M152L	MOVA-24H N1-M152L	MOVA-30H N1-M152L	MOVA-36H N1-M152L
NOMINAL CAPACITY				
Cooling (BTU/h)	18,000	24,000	30,000	36,000
Heating (BTU/h)	18,000	24,000	30,000	36,000
ELECTRICAL DATA				
Voltage / Phase (60 Hz)	208/230 / 1	208/230 / 1	208/230 / 1	208/230 / 1
Min. / Max. Voltage	187/253	187/253	187/253	187/253
MCA	13.0	15.5	17.2	23.0
MOP	20	24	30	40
COMPRESSOR				
Type	Scroll	Scroll	Scroll	Scroll
Stage	Single	Single	Single	Single
RLA	8	8	8	8
LRA	48	52	72	75
Crankcase Heater	Yes	Yes	Yes	Yes
CONDENSER COIL				
Throttle Type	Tube & Fin	Tube & Fin	Tube & Fin	Tube & Fin
Tube Size(O.D)	3/16	3/16	3/16	3/16
FAN MOTOR				
Motor Type	ECM	ECM	ECM	ECM
Horsepower (HP)	1-1/6	1-1/6	1-1/6	1-1/3
Full Load Amps (FLA)	1.6	1.6	1.6	2.2
REFRIGERATION SYSTEM				
Liquid Valve Size (O.D.)	3/8	3/8	3/8	3/8
Suction Valve Size (O.D.)	3/4	3/4	3/4	3/4
Liquid Line Size ("O.D.)	3/8	3/8	3/8	3/8
Suction Line Size ("O.D.)	3/4	3/4	3/4	3/4
Refrigerant Charge (lbs. - oz.)	5 LBS.-4 OZ	6 LBS.-7 OZ	6 LBS.-7 OZ	7 LBS.-2 OZ
Superheat(°F)	9°F	9°F	9°F	9°F
OPERATION RANGE				
Cooling(°F)	55-115	55-115	55-115	55-115
Heating(°F)	5-86	5-86	5-86	5-86
SOUND POWER (DB)	72	74	73	73

Specifications

	MOVA-42H N1-M152L	MOVA-48H N1-M152L	MOVA-60H N1-M152L	MOVA-61H N1-M152L
NOMINAL CAPACITY				
Cooling (BTU/h)	42,000	48,000	60,000	60,000
Heating (BTU/h)	42,000	48,000	60,000	60,000
ELECTRICAL DATA				
Voltage / Phase (60 Hz)	208/230 / 1	208/230 / 1	208/230 / 1	208/230 / 1
Min. / Max. Voltage	187/253	187/253	187/253	187/253
MCA	26.9	29.6	34.6	38.9
MOP	50	50	60	60
COMPRESSOR				
Type	Scroll	Scroll	Scroll	Scroll
Stage	Single	Single	Single	Two-stage
RLA	8	8	8	29.3
LRA	112.3	94	127.1	118
Crankcase Heater	Yes	Yes	Yes	Yes
CONDENSER COIL				
Type	Tube & Fin	Tube & Fin	Tube & Fin	Tube & Fin
Tube Size(O.D)	3/16	3/16	9/32	9/32
FAN MOTOR				
Motor Type	ECM	ECM	ECM	ECM
Horsepower (HP)	1-1/3	1-1/3	1-1/3	1-1/3
Full Load Amps (FLA)	2.2	2.2	2.2	2.2
REFRIGERATION SYSTEM				
Liquid Valve Size (O.D.)	3/8	3/8	3/8	3/8
Suction Valve Size (O.D.)	7/8	7/8	7/8	7/8
Liquid Line Size ("O.D.)	3/8	3/8	3/8	3/8
Suction Line Size ("O.D.)	7/8	11/8	11/8	11/8
Refrigerant Charge (lbs. - oz.)	8 LBS.-7 OZ	8 LBS.-7 OZ	11 LBS.-5 OZ	10 LBS.-14 OZ
Superheat(°F)	9°F	9°F	9°F	9°F
OPERATION RANGE				
Cooling(°F)	55-115	55-115	55-115	55-115
Heating(°F)	5-86	5-86	5-86	5-86
SOUND POWER (DB)	76	76	78	79


3 Wiring Diagrams

MOVA-18HN1-M152L; MOVA-24HN1-M152L; MOVA-30HN1-M152L; MOVA-36HN1-M152L;
MOVA-42HN1-M152L; MOVA-48HN1-M152L; MOVA-60HN1-M152L;

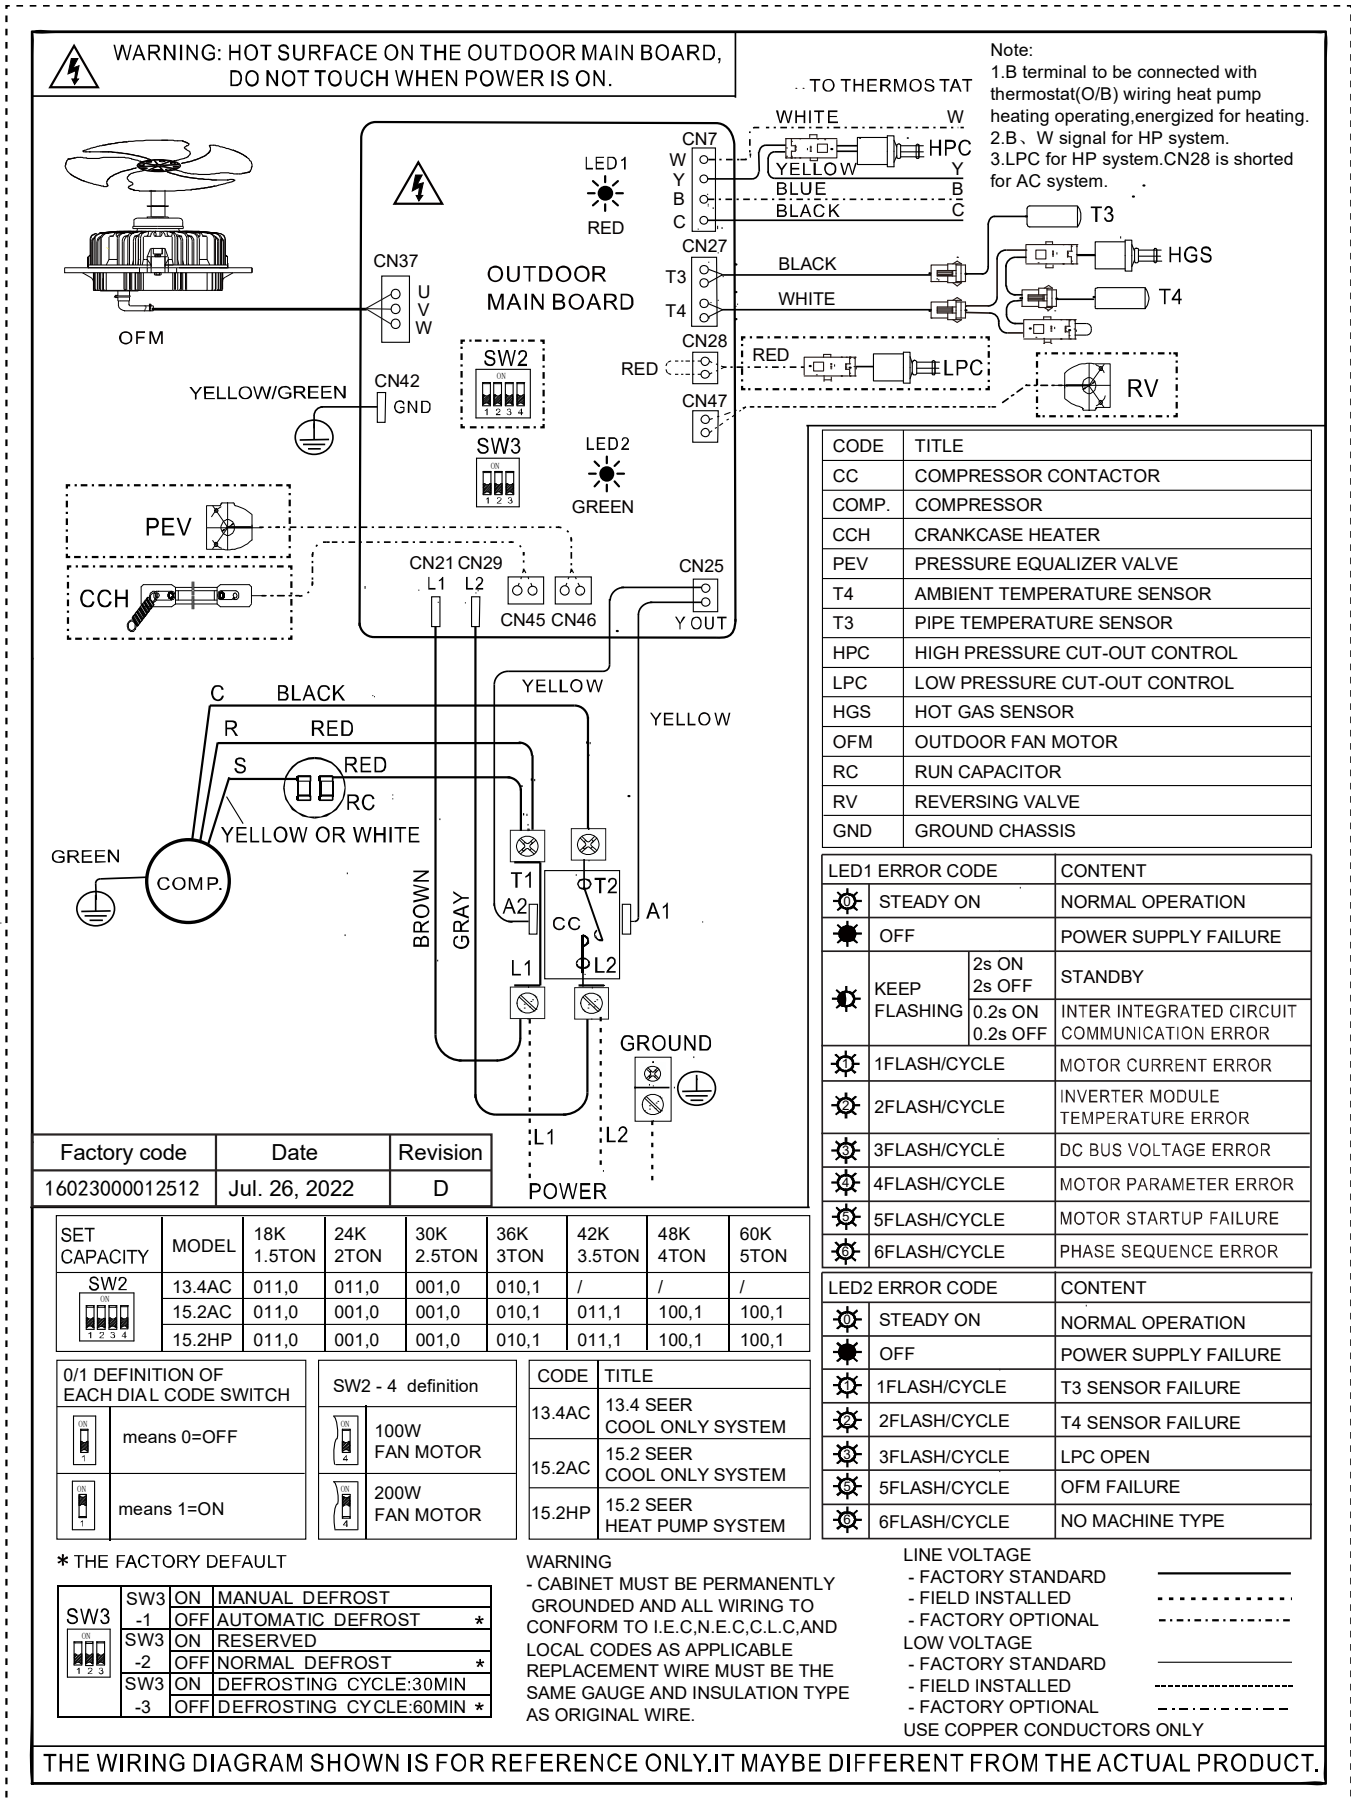

Wiring Diagrams

MOVA-61HN1-M152L;

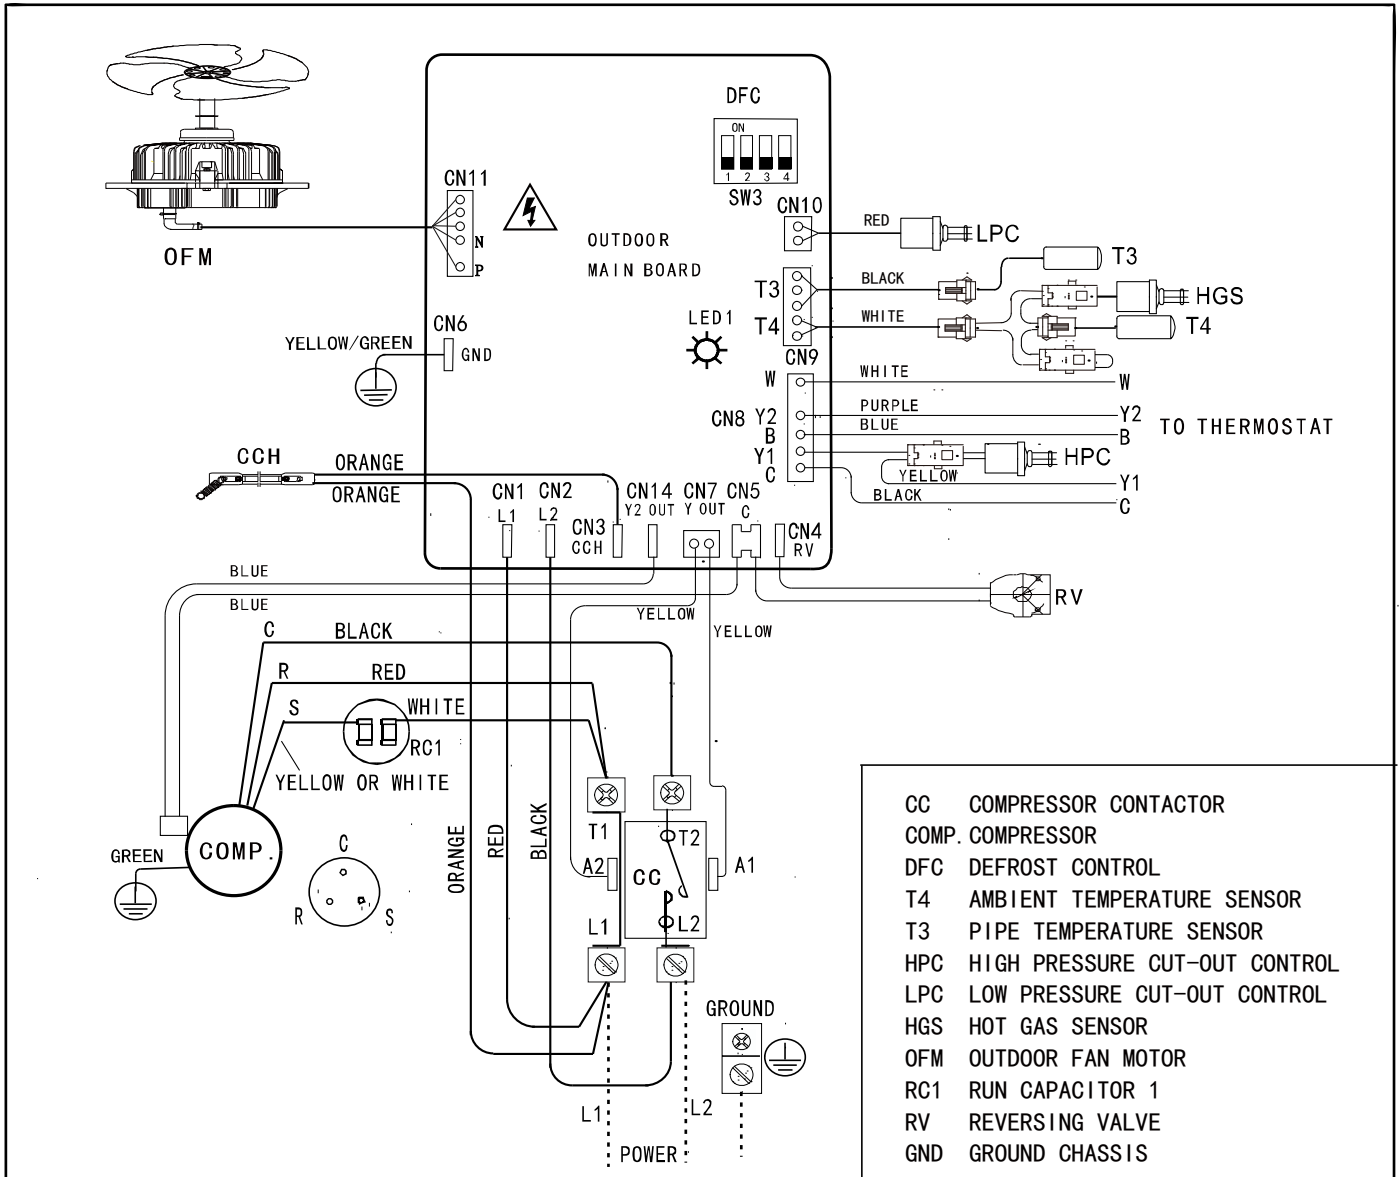

- CC COMPRESSOR CONTACTOR
- COMP. COMPRESSOR
- DFC DEFROST CONTROL
- T4 AMBIENT TEMPERATURE SENSOR
- T3 PIPE TEMPERATURE SENSOR
- HPC HIGH PRESSURE CUT-OUT CONTROL
- LPC LOW PRESSURE CUT-OUT CONTROL
- HGS HOT GAS SENSOR
- OFM OUTDOOR FAN MOTOR
- RC1 RUN CAPACITOR 1
- RV REVERSING VALVE
- GND GROUND CHASSIS

*THE FACTORY DEFAULT




SW3-1	ON	MANUAL DEFROST
	OFF	AUTOMATIC DEFROST *
SW3-2	ON	RESERVED
	OFF	NORMAL DEFROST *
SW3-3	ON	DEFROSTING CYCLE:30MIN
	OFF	DEFROSTING CYCLE:60MIN *
SW3-4	ON	RESERVED
	OFF	NORMAL *

	STEADY ON	NORMAL OPERATION
	OFF	DFC FAILURE
	1FLASH	T3 SENSOR FAILURE
	2FLASH	T4 SENSOR FAILURE
	3FLASH	LPC OPEN
	5FLASH	OFM FAILURE

- LINE VOLTAGE
- FACTORY STANDARD _____
 - FIELD INSTALLED*
 - FACTORY OPTIONAL - - - - -*
- LOW VOLTAGE
- FACTORY STANDARD _____
 - FIELD INSTALLED*
 - FACTORY OPTIONAL - - - - -*
- USE COPPER CONDUCTORS ONLY

WARNING

- CABINET MUST BE PERMANENTLY GROUNDED AND ALL WIRING TO CONFORM TO I. E. C, N. E. C, C. L. C, AND LOCAL CODES AS APPLICABLE
- REPLACEMENT WIRE MUST BE THE SAME GAUGE AND INSULATION TYPE AS ORIGINAL WIRE.

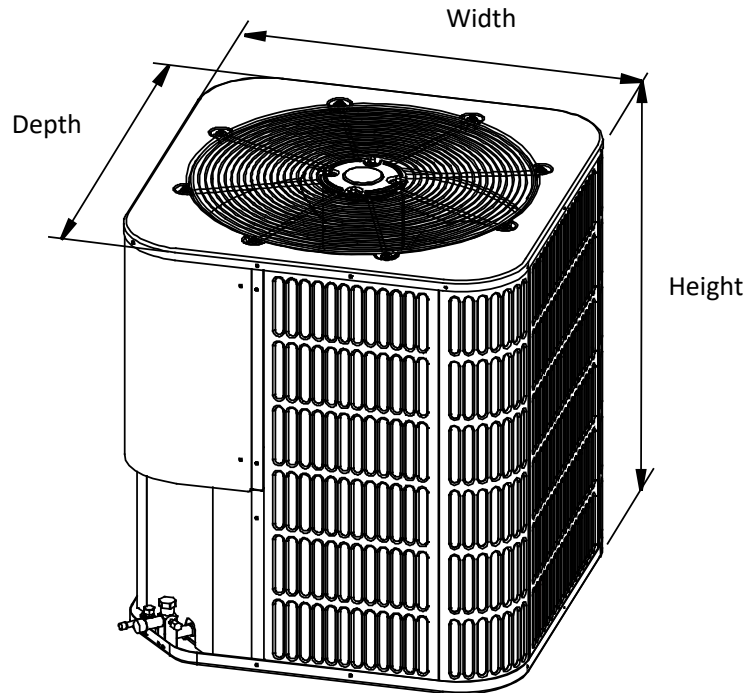4 Dimensions


	MOVA-18H N1-M152L	MOVA-24H N1-M152L	MOVA-30H N1-M152L	MOVA-36H N1-M152L
UNIT DIMENSION AND WEIGHTS				
Height (in.)	24-15/16	24-15/16	24-15/16	33-3/16
Width (in.)	23-5/8	28	28	28
Depth (in.)	23-5/8	28	28	28
Weight (lbs.)	137	154	157	179

	MOVA-42H N1-M152L	MOVA-48H N1-M152L	MOVA-60H N1-M152L	MOVA-61H N1-M152L
UNIT DIMENSION AND WEIGHTS				
Height (in.)	33-3/16	33-3/16	33-3/16	33-3/16
Width (in.)	29-1/8	29-1/8	29-1/8	29-1/8
Depth (in.)	29-1/8	29-1/8	29-1/8	29-1/8
Weight (lbs.)	198	201	218	227

Midea Building Technologies Division Midea Group

Add.: Midea Headquarters Building, 6 Midea Avenue, Shunde, Foshan, Guangdong, China

Postal code: 528311

mbt.midea.com / global.midea.com / tsp.midea.com

Note: Product specifications change from time to time as product improvements and developments are released and may vary from those in this document.

