


Dimensions

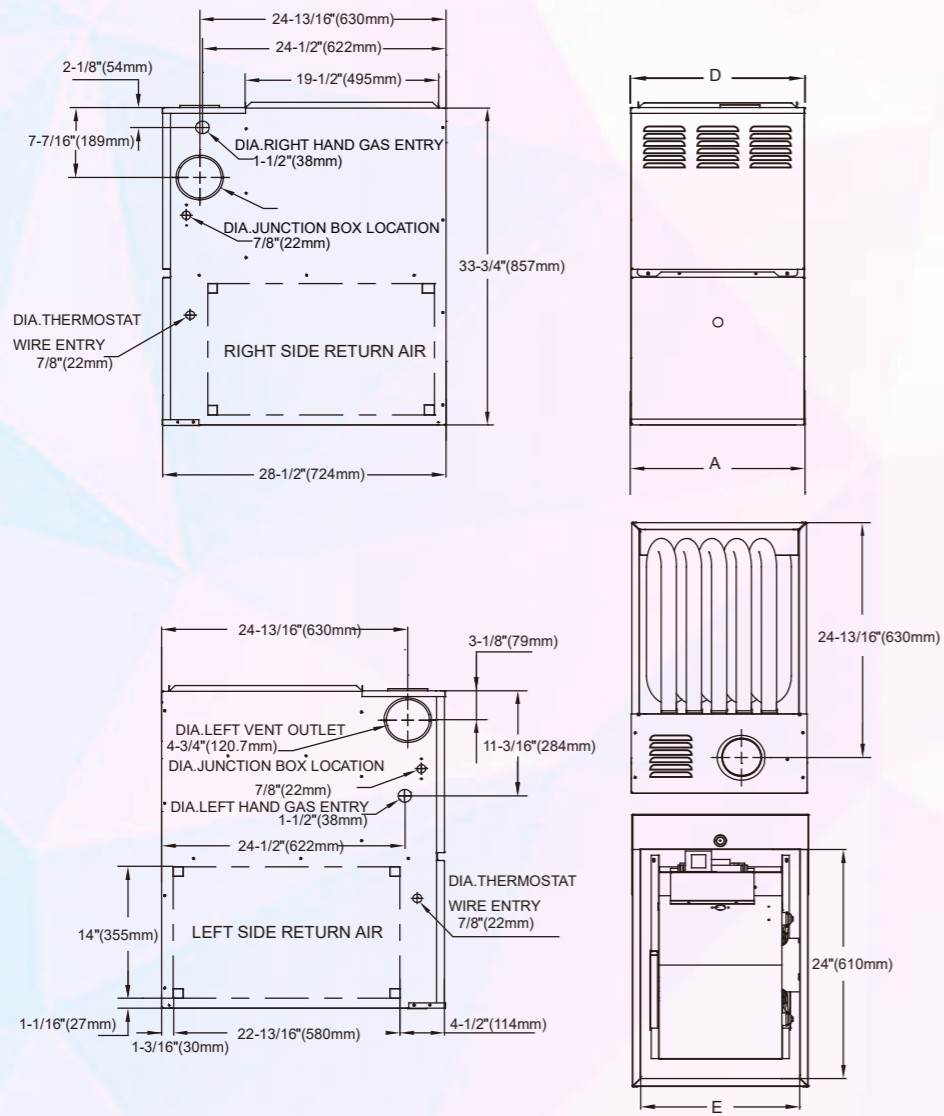

FURNACE SIZE	A CABINET WIDTH IN.	D SUPPLY AIR WIDTH IN.	E RETURN AIR WIDTH IN.	SHIP WT (lbs)
40A3A	14.5	13	15-57/32	119
60A3A	14.5	13	15-57/32	119
60B4A	17.5	16	15-27/32	126
80B4A	17.5	16	15-27/32	139
80C4A	21	19.5	19-13/32	146
100C5A	21	19.5	19-13/32	159
120D5A	24.5	23	22-27/32	170

Midea Building Technologies Division

Add.: Midea Headquarters Building, 6 Midea Avenue, Shunde, Foshan, Guangdong, China

Postal code: 528311

mbt.midea.com / global.midea.com / tsp.midea.com

Note: Product specifications change from time to time as product improvements and developments are released and may vary from those in this document.



MGH80 Series Gas Furnace

80% AFUE

Standard Features

- ❖ Durable aluminized steel tubular heat exchanger.
- ❖ Hot-surface ignition for dependable operation.
- ❖ Quiet multi-speed direct-drive Blower.
- ❖ Natural gas and propane (LP) convertible.
- ❖ Designed for multi-position installation:
Up flow, down flow, horizontal.
- ❖ Industry-standard cabinet sizes for easy replacement, installation and add-on cooling.
- ❖ Convenient left or right connection for gas and electric service.
- ❖ Removable bottom for side or bottom return application.



Midea-Discover Easy Comfort



Specifications

Model	MGV80M040A3A	MGV80M060A3A	MGV80M060B4A	MGV80M080B4A
FUEL TYPE	Natural/Propane Gas	Natural/Propane Gas	Natural/Propane Gas	Natural/Propane Gas
GAS HEATING PERFORMANCE				
Input (BTU/h)	40,000	60,000	60,000	80,000
Output (BTU/h)				
Natural Gas	32,000	48,000	48,000	64,000
LP Gas	32,000	48,000	48,000	64,000
AFUE	80	80	80	80
Available AC @ 0.5" ESP	1/1.5/2/2.5	1.5/2/2.5/3	1.5/2/2.5/3	2.5/3/3.5/4
Temperature Rise Range (° F)	20-50	25-55	25-55	30-60
ELECTRICAL DATA				
Voltage/Phase(60Hz)	115	115	115	115
Min. / Max. Voltage	104/127	104/127	104/127	104/127
Min. Circuit Ampacity	6	6	6	6
Max. Overcurrent Protection	15	15	15	15
FAN MOTOR				
Motor Type	ECM	ECM	ECM	ECM
Horsepower	1/2	1/2	1/2	1/2
Rated RPM	1050	1050	1050	1050
Full Load Amps (FLA)	8	8	8	8
Capacitor (uF)	\	\	\	\
CIRCULATOR BLOWER				
Material	Metal	Metal	Metal	Metal
Type	Centrifugal	Centrifugal	Centrifugal	Centrifugal
Size (D x H) (in.)	11-3/16x 6-9/64	11-3/16x 6-9/64	11-3/16x 9-41/64	11-3/16x 9-41/64
Vent Diameter ¹	3"/4"	3"/4"	3"/4"	3"/4"
No. of Burners	3	3	3	5
Speed Mode Number	5	5	5	5

Specifications

Model	MGV80M080C4A	MGV80M100C5A	MGV80M120D5A
FUEL TYPE	Natural/Propane Gas	Natural/Propane Gas	Natural/Propane Gas
GAS HEATING PERFORMANCE			
Input (BTU/h)	80,000	100000	120000
Output (BTU/h)			
Natural Gas	64,000	80,000	96,000
LP Gas	64,000	80,000	96,000
AFUE	80	80	80
Available AC @ 0.5" ESP	2.5/3/3.5/4	3.5/4/4.5/5	3.5/4/4.5/5
Temperature Rise Range (° F)	30-60	30-60	35-65
ELECTRICAL DATA			
Voltage/Phase(60Hz)	115	115	115
Min. / Max. Voltage	104/127	104/127	104/127
Min. Circuit Ampacity	6	12.3	13
Max. Overcurrent Protection	15	20	20
FAN MOTOR			
Motor Type	ECM	ECM	ECM
Horsepower	1/2	1	1
Rated RPM	1050	1050	1050
Full Load Amps (FLA)	8	14	14
Capacitor (uF)	\	\	\
CIRCULATOR BLOWER			
Material	Metal	Metal	Metal
Type	Centrifugal	Centrifugal	Centrifugal
Size (D x H) (in.)	11-3/16 x 11-3/16	11-3/16 x 11-3/16	12-6/8 x 11-1/4
Vent Diameter ¹	3"/4"	3"/4"	3"/4"
No. of Burners	5	6	7
Speed Mode Number	5	5	5