

Please Do Not Remove

Construction Solutions

7801 E. Gray Rd. Suite 110
Scottsdale, AZ 85260

Ph: (866) 270-8240
Fax: (480) 346-8250

www.dryersolutions.com

4 Inch Wall

**DBX1000™ Recessed Vent Receptacle
Installation Instructions**


Material used in the DBX 1000 meets UL94 HB Flammability Testing and is recognized by Underwriters Laboratories Inc. Representative samples of this component have been evaluated by UL and meet applicable UL requirements.



For optimum results, install the **4 Inch Wall DBX1000™ Recessed Vent Receptacle** as follows:


Installation Instructions

1. Orient box to match desired venting direction
2. Score and remove appropriate 4 inch oval vent pipe knock out. Allow 4" of pipe inside box
3. If gas line is to be installed, locate 1 $\frac{5}{8}$ " straw clamp on top or bottom of box. Cut the webs between the 8 fins with a utility knife. Push the gas line through the straw clamp.
4. Attach box directly to both right *and* left studs. Use the two snap-in mounting straps for 24" on-center applications.
5. **Spacing tabs will automatically position box so that bottom, inside edge is from 2 $\frac{1}{4}$ " to 2 $\frac{5}{8}$ " inches above unfinished floor to allow clearance between trim ring and finished floor covering. Tabs may be removed if a different spacing is desired.**

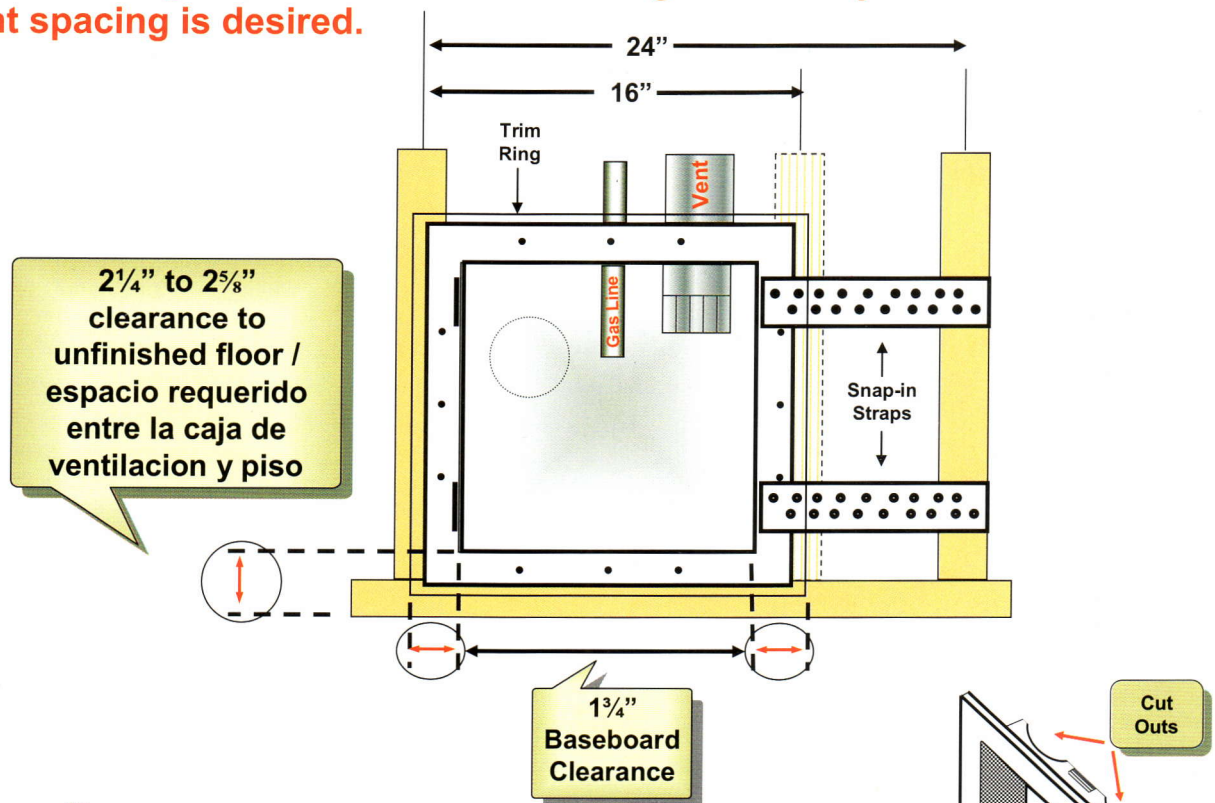

Trim Instructions

1. Snap out left or right trim ring "cut out" (see detail at right).
2. **Allow 1 $\frac{3}{4}$ " inches between inside edge of box and end of baseboard to allow for trim ring clearance.**
3. Snap trim ring into opening, no adhesive or caulk required.



BASEBOARD TRIM INSTRUCTIONS

Leave 1 $\frac{3}{4}$ Inch From Inside Edge of Box to End of Baseboard for Trim Ring Clearance.

INSTRUCCIONES PARA LA MOLDURA

Deje 1 $\frac{3}{4}$ pulgadas empezando por dentro de la caja hasta la orilla de la moldura, para poder dejar separación al anillo de la caja.

