


Model ACD2440 Shown Closed



MODEL	DESCRIPTION	PACKAGE
ACD2440L	24 x 40	1
ACD2446L	24 x 46	1
ACD2452L	24 x 52	1
ACD2460L	24 x 60	1


Model ACD2440 Shown Open



1			
	MODEL	DESCRIPTION	PACKAGE
	ACD2440S	24 x 40	1
	ACD2446S	24 x 46	1
	ACD2452S	24 x 52	1
	ACD2460S	24 x 60	1

ACD2440 Series

- Designed for ceiling or sidewall access panel application
- Access only (solid) Service/Return air (louvered)
- ❖ Heavy gauge steel and sturdy steel case is enframed to accept standard 20" x 20" x 1" filter (not included)
- Top mounted with hooks and bottom latched face
- ❖ 1/2" louvered spaced in dual angular formation for higher strength and maximum free area
- Easy install and maintenance
- White powder coat finish

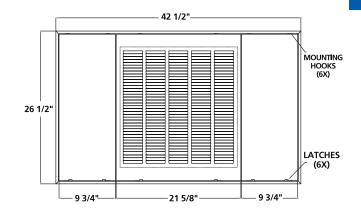

MODEL ACD2440L Shown

		A	В	C	U
MODEL	DESCRIPTION	Drywall Opening	Frame Dimensions	Access Clearance	Outside Frame Dimensions
ACD2440L	Louvered	24" x 40"	23 5/8" x 39 5/8"	22 5/8" x 38 5/8"	26 1/2" x 42 1/2"
ACD2440S	Solid	24" x 40"	23 5/8" x 39 5/8"	22 5/8" x 38 5/8"	26 1/2" x 42 1/2"
ACD2446L	Louvered	24" x 46"	23 5/8" x 45 5/8"	22 5/8" x 44 5/8"	26 1/2" x 48 1/2"
ACD2446S	Solid	24" x 46"	23 5/8" x 45 5/8"	22 5/8" x 44 5/8"	26 1/2" x 48 1/2"
ACD2452L	Louvered	24" x 52"	23 5/8" x 51 5/8"	22 5/8" x 50 5/8"	26 1/2" x 54 1/2"
ACD2452S	Solid	24" x 52"	23 5/8" x 51 5/8"	22 5/8" x 50 5/8"	26 1/2" x 54 1/2"
ACD2460L	Louvered	24" x 60"	23 5/8" x 59 5/8"	22 5/8" x 58 5/8"	26 1/2" x 62 1/2"
ACD2460S	Solid	24" x 60"	23 5/8" x 59 5/8"	22 5/8" x 58 5/8"	26 1/2" x 62 1/2"

