



# 96% *Gas Furnace*




## Features

- ❖ Durable aluminized steel tubular heat exchanger.
- ❖ Stainless-steel secondary heat exchanger.
- ❖ Two-stage gas valve.
- ❖ Hot surface igniter.
- ❖ Quiet multi-speed ECM circulator blower motor.
- ❖ Control board with self-diagnostics and Low-voltage terminal block.
- ❖ Natural gas and propane (LP) convertible.
- ❖ Designed for multi-position installation:  
Upflow, horizontal.
- ❖ Industry-standard cabinet sizes for easy replacement, installation and add-on cooling.
- ❖ Convenient left or right connection for gas and electric service.
- ❖ Removable bottom for side or bottom return applications.



## Component Location

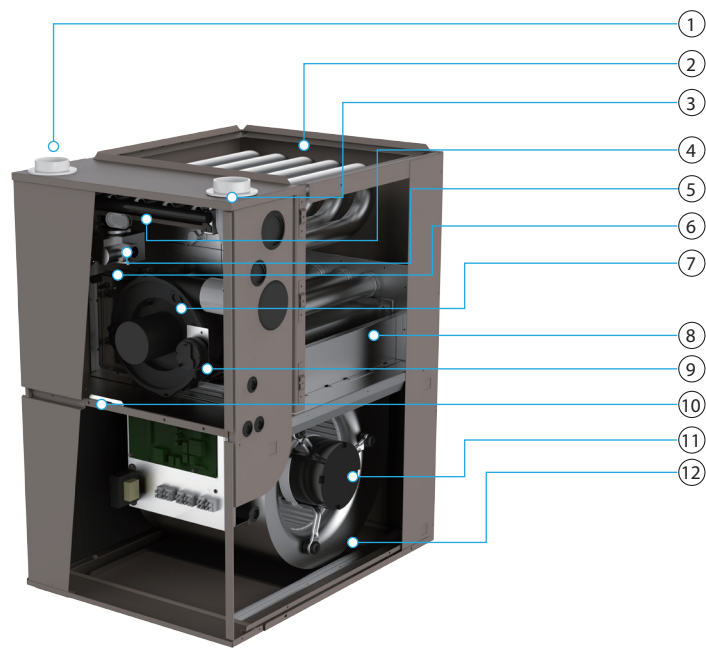

- |                          |                   |                             |                                    |
|--------------------------|-------------------|-----------------------------|------------------------------------|
| 1. Air inlet pipe joint  | 4. Burner         | 7. Induced blower and motor | 10. Blower door interlock switch   |
| 2. First heat exchanger  | 5. Gas valve      | 8. Second heat exchanger    | 11. ECM motor of circulator blower |
| 3. Air outlet pipe joint | 6. Condensate pan | 9. Pressure switch          | 12. Circulator blower              |

## Specifications

Model (MGH93M)	060B3A	080B3A	080C4A	100C5A	100D5A	120D5A
Configuration	Upflow/horizontalflow(left-right)					
Heating Efficiency(AFUE)	96%					
Dimensions (H×W×D)(in.)	28-1/2×17-1/2×33-3/4		28-1/2×21×33-3/4		28-1/2×24-1/2×33-3/4	
Net/Gross Weight(lbs)	135.5/147.5	141/153	156/169.6	162/173	169.6/181.7	174/186

## Commercial Air Conditioner Division

### Midea Group

Add.: Midea Headquarters Building, 6 Midea Avenue, Shunde, Foshan, Guangdong, China

Postal code: 528311

Tel: +86-757-26338346 Fax: +86-757-22390205

cac.midea.com    global.midea.com



Note: Product specifications change from time to time as product improvements and developments are released and may vary from those in this document.