

# B-Flex™

**Metal-Fab's double wall B-Flex™ can be used as a connector or as a segment of B-Vent in a variety of installations.**



**Flexible double wall for easy B-Vent pipe fitting.**

## Applications

Use B-Flex™ anywhere B-Vent is required, except where pipe penetrates the structure walls, floors, ceilings or roof.

### USED AS A CONNECTOR



Make a direct connection from one or both appliances to a common B-Vent.


### USED IN A CRAWL SPACE



Easily connect a furnace located in a crawl space to a rigid B-Vent penetration.

### USED THROUGH AN ATTIC

#### USED IN ATTIC

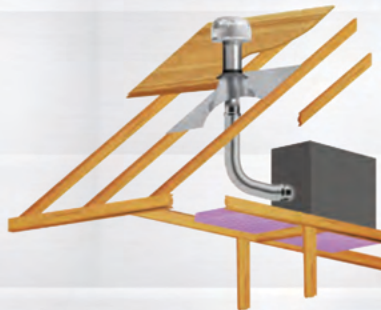

Make a quick connection from an attic furnace to a rigid B-Vent penetration.



Connect a furnace to a termination on a conventional installation with ease.



**Faster. Safer. Better.**

# Double Wall Versatility, Flexible Advantages.

## Quick & Easy

B-Flex™ eliminates measuring, special adapters and assembly of rigid pipe lengths.

## Cost Savings

Saves time and labor, a universal solution to connecting appliances to rigid B-Vent.

## Convenience

Ready to install right out of the box with factory-assembled male and female positive twist-lock ends.

## Adaptability

Can be used with other specifically identified competing brands of UL listed round gas vent 3" through 6" diameters.



UL listed for use as connection from the appliance to rigid Type-B gas vent, and as a segment of B-Vent.

Metal-Fab's approval includes connections at both the male (outlet) and female (inlet) end to the following B-Vent products but is not limited to:

American Metal Products Co.	(Amerivent)
Continental Industries, Inc.	(AirJet)
ECCO Manufacturing	(Model E/R)
Hart & Cooley, Inc.	(Hart & Cooley B-Vent)
M&G Duravent, Inc.	(Type B Gas Vent)
Mitchell Metal Products, Inc.	(Mitch Vent)
Selkirk Corporation	(Energy Vent)



At the male (outlet) end of the compatible gas vent, add an adapter or adjustable length (M6A, M12A, M18A) – then add sections of Metal-Fab B-Vent pipe. At the female (inlet) end of the compatible gas vent, simply insert the male end of the Metal-Fab B-Vent into the compatible gas vent and secure per installation instructions.